

BNETA IoT

DashCam

3 CHANNEL

Drive Assured with
Reliable Surveillance



MODEL

F300

DASHCAM OVERVIEW

01 Power Button/IR Mode

02 Mode/Menu Button

03 UP Button

04 Down Button


05 OK Button

06 TF Card Slot

07 Power Slot (USB-C)

08 Reset Hole

09 Fill Light

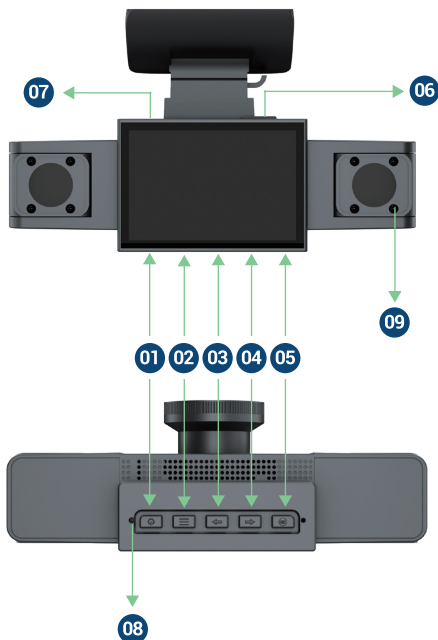

OPERATING INSTRUCTIONS

01 POWER

The Camera: Long-press Power button for 2-3s to turn ON/OFF.

Infrared Light: Short-press Power button to turn the infrared light ON/OFF. Turn ON/OFF in working status.

02 MENU/ MODE

Enter Menu Settings: Long-press Menu button once in non-recording status.

Exit the Menu Setting: Short-press on Menu button in Menu status.

Enter Video Playback Mode: Short-press button once in non-recording status.

03 UP BUTTON

Short-press once to scroll UP in Menu setting.

Short-press once to switch the display windows of the front camera, interior (cabin) camera, and left/right camera.

Short-press once to scroll to previous video files in Playback mode.

04 DOWN BUTTON

Short-press once to scroll DOWN in Menu setting.

Short-press once to mute Audio Recording in Video Mode.

Short-press once to scroll to next video files in Playback Mode.

05 OK BUTTON

Recording: Short-press once to start/stop video recording.

Short-press once to play/pause current video in Playback mode.

Short-press once to enter/save the setting in Menu setting.

08 RESET

Reset the Dash Cam.

09 FILL LIGHT

Fill lights for the cabin cameras, turn it ON/OFF by short-pressing the Power button when recording.

INSTALL FRONT CAMERA



STEP 1: MOUNTING THE ELECTROSTATIC FILM



IMPORTANT!

Before sticking on the camera, be sure to clean the windshield properly. If the glass is dirty, the bracket will not adhere and can easily fall off.

Clean the windshield glass with the cleaning accessory included in the box.

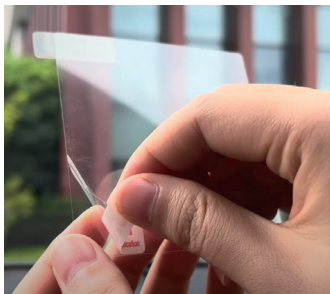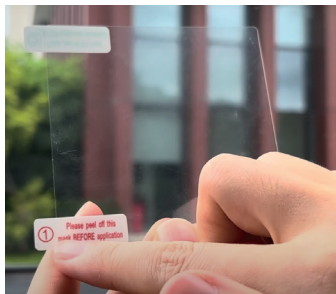

Please peel off the cover marked "①", then mount onto the glass.



After mounting the film on the cleaned windshield glass, peel off the other cover marked "②".

STEP 2: INSTALLING THE BRACKET


Remove the film on the bracket cover. Then place it on the electrostatic film.






STEP 3: CONNECT THE CAMERA

Connect the car charger to camera's USB port and wire the cable according to the overall wiring diagram below.

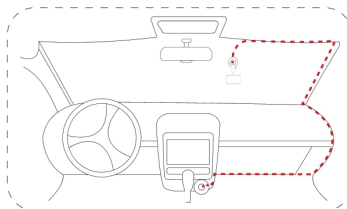

Wiring Method A

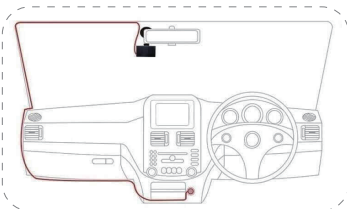

Wiring Method B

IMPORTANT!

Please use the original car charger provided to avoid a fault or incompatibility.

INSTALL CAR CHARGER CABLE



Hide the cable into to the top panel as the photo



Break the side panel slightly and insert the cable. Be extra careful if there is an airbag.



Insert the cable to the door's sealing tape.



Insert the cable according to the door's sealing tape.



Insert the cable according to the door's sealing tape.



Connect the car charger to cigarette lighter.

IMPORTANT NOTES



If your vehicle has side curtain airbags please be very careful when running any cables along your vehicle windows. Ensure you are not running the cable past any of the airbags as this can prevent the airbags from deploying.

Please make sure the cigarette lighter is clean for connection.

Please check the car charger's red indicator whether is on.



BNETA IoT

DashCam

3 CHANNEL

Drive Assured with
Reliable Surveillance

BNETA International

www.bnet.co.za

sales@bnet.co.za

support@bnet.co.za (Technical)

Tel: +27 11 032 7900

MODEL

F300

User Manual